

# Globe Non-Return Valve

Pressure Rating: PN 16  
 Face to Face: DIN EN 558-1 Series 1  
 Material of Construction: Ductile Cast Iron GGG 40/50



DN 20 - DN 300

Catalogue No: 10-2000116


<b>Range of application: Water, steam</b>				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
20 - 300	16	24	16	16

*In case of order please specify the working conditions* *Other working temperatures possible on request*



<b>Materials / Equipment</b>	
<b>Catalogue No.</b>	<b>10-2000116</b>
Body	GGG 40/50
Cover	GGG 40/50
Cone	GGG 40/50
Body seating	Bronze
Stem	Stainless steel 1.4021
Spring	Stainless steel
Cone seat	Bronze
Corrosion protection	Epoxy powder coated RAL 5015

Size	Face to face length acc. to DIN EN 558-1 Series 1	Flange Ø	Weight	
DN mm	L mm	D mm	h mm	kg
20	150	105	69	4
25	160	115	75	5
32	180	140	78	7
40	200	150	93	9
50	230	165	97	11
65	290	185	111	15
80	310	200	132	21
100	350	220	155	30
125	400	250	168	44
150	480	285	218	62
200	600	340	263	98
250	730	405	308	158
300	850	460	353	224

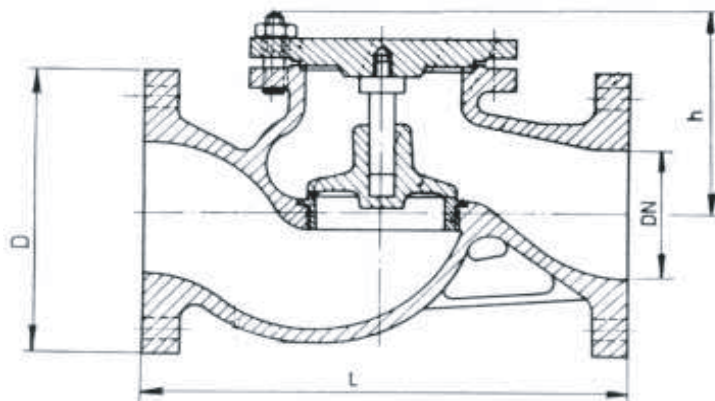

*We reserve the right to make technical modifications*

## SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515  
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia  
 E-mail: [info@saudivalves.com](mailto:info@saudivalves.com) - Internet: [www.saudivalves.com](http://www.saudivalves.com)



N° 215125

20.03.2009