

Suction Strainer

Material of Construction: Ductile Cast Iron GGG 40/50



DN 50 – DN 600

Catalogue No: 14-2000000

Range of application: Potable water				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 600	-	-	-	-


In case of order please specify the working conditions



Materials / Equipment	
Catalogue No.	14-2000000
Body	GGG 40/50
Strainer	Stainless steel 1.4301
Bolts and nuts	Stainless steel A2
Corrosion protection	Epoxy powder coated RAL 5015

Size	Dimensions			Weight kg
	DN mm	D mm	H mm	
50	165	138	95	3.50
65	185	145	130	4.00
80	200	161	145	5.50
100	220	200	190	7.00
125	250	228	220	10.00
150	285	272	240	12.00
200	340	363	290	18.00
250	400	459	340	29.00
300	455	485	400	33.00
350	520	501	450	41.00
400	580	510	562	50.00
500	715	746	620	68.00
600	840	846	730	76.00

*We reserve the right to make technical modifications
Flanges drilled PN 10 or PN 16 rating*

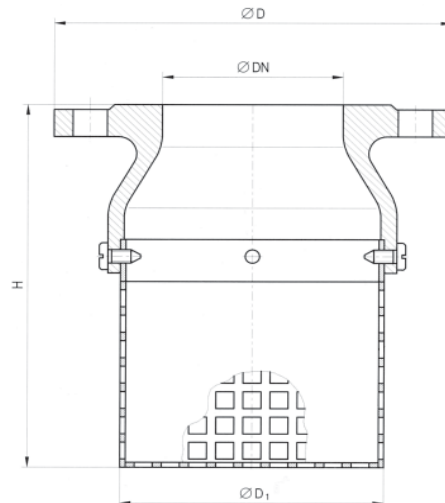

SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515
P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia
E-mail: info@saudivalves.com - Internet: www.saudivalves.com



N° 215125