

Double Orifice Air Valve according to ANSI Class 150



Pressure Rating: PN 25
 Material of Construction: Ductile Cast Iron GGG 40/50
 Flanges Flat Faced, drilled

DN 50 - DN 300

Catalogue No: 8-2220025-150

Range of application: Potable water				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 300	25	37.5	25	25


In case of order please specify the working conditions

Materials / Equipment	
Catalogue No.	8-2220025-150
Body	GGG 40/50
Cover	GGG 40/50
Balls	Stainless steel 1.4571
Gaskets	EPDM or NBR
Guides	Bronze
Bolts and Nuts	Stainless steel A4
Corrosion protection	Epoxy powder coated RAL 5015



Size DN mm	Dimensions			Weight kg	Volume m ³
	L mm	B mm	H mm		
50	410	190	240	30	0.02
65	410	190	240	32	0.02
80	410	190	240	34	0.02
100	440	190	260	49	0.03
150	560	245	330	72	0.05
200	700	315	440	121	0.10
250	945	470	490	170	0.22
300	945	470	540	195	0.24

We reserve the right to make technical modifications
 Flanges flat faced
 flanges drilled acc. to ANSI class 150

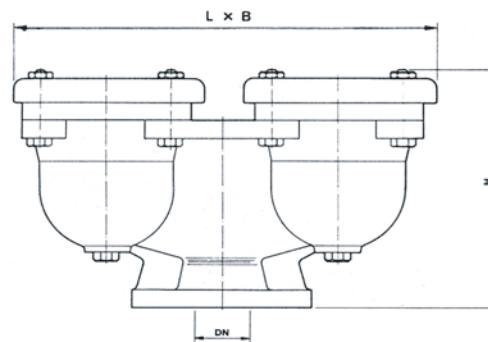

SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia
 E-mail: info@saudivalves.com - Internet: www.saudivalves.com



N° 215125

20.03.2009