

Single Orifice Air Valve

Pressure Rating: PN 25
 Material of Construction: Ductile Cast Iron GGG 40/50



DN 50 - DN 300

Catalogue No: 8-2210025

Range of application: Potable water				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 300	25	37.5	25	25


In case of order please specify the working conditions

Materials / Equipment	
Catalogue No.	8-2210025
Body	GGG 40/50
Covers	GGG 40/50
Ball	Stainless steel 1.4301
Gaskets	EPDM or NBR
Bolts and nuts	Stainless steel A2
Corrosion protection	Epoxy powder coated RAL 5015



size DN mm	Dimensions			Weight kg	Volume m³
	D mm	L mm	H mm		
50	165	180	260	14	0.01
80	200	230	294	20	0.02
100	235	280	353	35	0.03
150	300	380	412	72	0.05
200	360	450	580	122	0.10
250	425	450	580	138	0.11
300	485	450	580	149	0.13

We reserve the right to make technical modifications

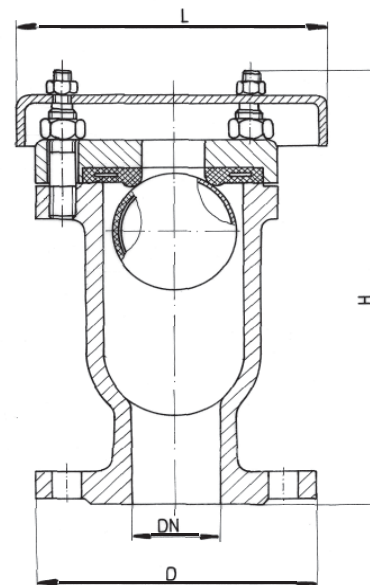

SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia
 E-mail: info@saudivalves.com - Internet: www.saudivalves.com

ISO 9001

BUREAU VERITAS
 Certification



N° 215125

20.03.2009