

# Double Orifice Air Valve

Pressure Rating: PN 16  
Material of Construction: Ductile Cast Iron GGG 40/50



DN 50 - DN 200

Catalogue No: 8-2220016-SD

<b>Range of application: Potable water</b>				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 200	16	24	16	16


*In case of order please specify the working conditions*

<b>Materials / Equipment</b>	
<b>Catalogue No.</b>	<b>8-2220016-SD</b>
Body	GGG 40/50
Cover	GGG 40/50
Cap	GGG 40/50
Gaskets	EPDM or NBR
Balls	Stainless steel 1.4301
Bolts and Nuts	Stainless steel A4
Double nipple	Stainless steel A4
Corrosion protection	Epoxy powder coated RAL 5015



Size DN mm	Dimensions Flange Acc to EN 1092-2			Weight kg	Volume m <sup>3</sup>
	A mm	B mm	S Ø mm		
50	165	337	65	12	0.01
80	200	376	95	14	0.01
100	220	388	123	17	0.02
150	285	420	150	29	0.03
200	340	460	200	43	0.03

*We reserve the right to make technical modifications*

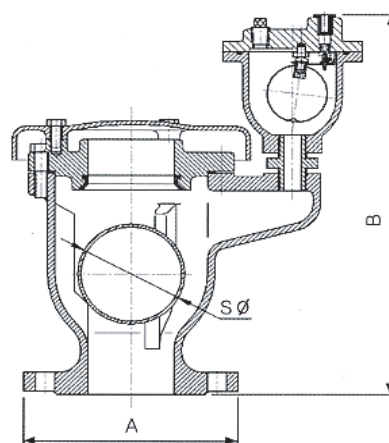

## SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515  
P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia  
E-mail: [info@saudivalves.com](mailto:info@saudivalves.com) - Internet: [www.saudivalves.com](http://www.saudivalves.com)

