

# Double Orifice Air Valve

Pressure Rating: PN 25  
 Material of Construction: Ductile Cast Iron GGG 40/50



DN 50- DN 300

Catalogue No: 8-2220025

Range of application: Potable water				
Size DN	Pressure rating PN	Hydrost. test pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 300	25	37.5	25	25


*In case of order please specify the working conditions*



Materials / Equipment	
Catalogue No.	8-2220025
Body	GGG 40/50
Cover	GGG 40/50
Balls	Stainless steel 1.4301
Gaskets	EPDM or NBR
Guides	Bronze
Bolts and Nuts	Stainless steel A2
Corrosion protection	Epoxy powder coated RAL 5015

Size DN mm	Dimensions Flange Acc to EN 1092-2			Weight kg	Volume m³
	L mm	B mm	H mm		
50	410	190	240	30	0.02
65	410	190	240	32	0.02
80	410	190	240	34	0.02
100	440	190	260	49	0.03
150	560	245	330	72	0.05
200	700	315	440	121	0.10
250	945	470	490	170	0.22
300	945	470	540	195	0.24

*We reserve the right to make technical modifications*

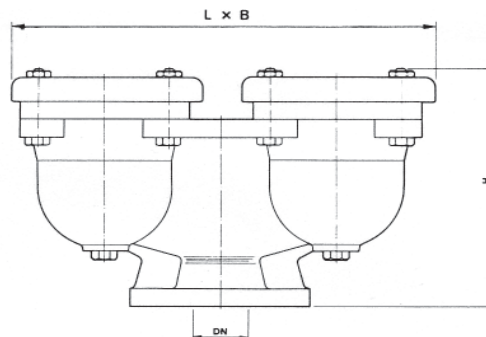

## SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515  
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia  
 E-mail: [info@saudivalves.com](mailto:info@saudivalves.com) - Internet: [www.saudivalves.com](http://www.saudivalves.com)

ISO 9001

BUREAU VERITAS  
 Certification



N° 215125

20.03.2009