

Double Orifice Air Valve with Integrated Isolation Valve

Pressure Rating: PN 16
 Material of Construction: Ductile Cast Iron GGG 40/50



DN 50 - DN 200

Catalogue No: 8-2230016

Range of application: Potable water				
Size DN	Pressure rating PN	Hydrotest pressure in bar		Admissible working pressure in bar up to 70°C
		Body	Seat	
50 - 200	16	24	16	16


In case of order please specify the working conditions



Materials / Equipment	
Catalogue No.	8-2230016
Body	GGG 40/50
Covers	GGG 40/50
Balls	Stainless steel 1.4301
Gaskets	EPDM or NBR
Stem	Stainless steel 1.4021
Valve seat in the body	Bronze
Valve seat on the cone	Bronze
Bolts and nuts	Stainless steel A2
Corrosion protection	Epoxy powder coated RAL 5015
Handwheel	GGG 40-50

size DN mm	Dimensions				Weight kg	Volume m³
	D mm	L mm	B mm	H mm		
50	165	390	170	305	30	0.02
80	200	600	250	395	65	0.06
100	220	700	280	455	102	0.09
150	285	930	400	560	230	0.21
200	340	1100	500	690	370	0.38

We reserve the right to make technical modifications

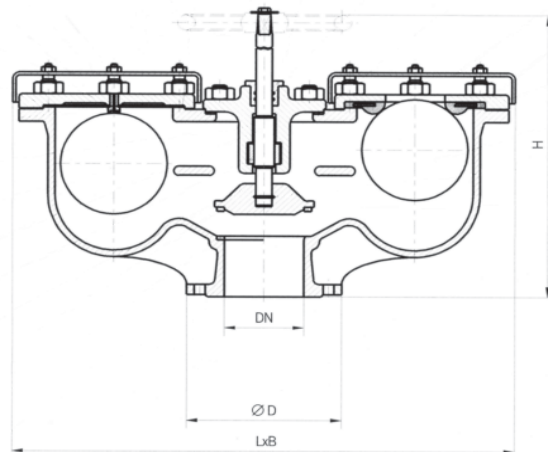

SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia
 E-mail: info@saudivalves.com - Internet: www.saudivalves.com

ISO 9001
 BUREAU VERITAS
 Certification



N° 215125

20.03.2009