

Single Orifice Air Valve

Pressure Rating: PN 25
 Material of Construction: Ductile Cast Iron GGG 40/50



DN 50 - DN 300

Catalogue No: 8-2210025

| Range of application: Potable water | | | | |
|-------------------------------------|-----------------------|---------------------------|------|--|
| Size DN | Pressure rating PN | Hydrotest pressure in bar | | Admissible working pressure in bar up to 70°C |
| | | Body | Seat | |
| 50 - 300 | 25 | 37.5 | 25 | 25 |


In case of order please specify the working conditions

| Materials / Equipment | |
|-----------------------|------------------------------|
| Catalogue No. | 8-2210025 |
| Body | GGG 40/50 |
| Covers | GGG 40/50 |
| Ball | Stainless steel 1.4301 |
| Gaskets | EPDM or NBR |
| Bolts and nuts | Stainless steel A2 |
| Corrosion protection | Epoxy powder coated RAL 5015 |



| size DN mm | Dimensions | | | Weight kg | Volume m³ |
|------------------|------------|---------|---------|--------------|--------------|
| | D mm | L mm | H mm | | |
| 50 | 165 | 180 | 260 | 14 | 0.01 |
| 80 | 200 | 230 | 294 | 20 | 0.02 |
| 100 | 235 | 280 | 353 | 35 | 0.03 |
| 150 | 300 | 380 | 412 | 72 | 0.05 |
| 200 | 360 | 450 | 580 | 122 | 0.10 |
| 250 | 425 | 450 | 580 | 138 | 0.11 |
| 300 | 485 | 450 | 580 | 149 | 0.13 |

We reserve the right to make technical modifications

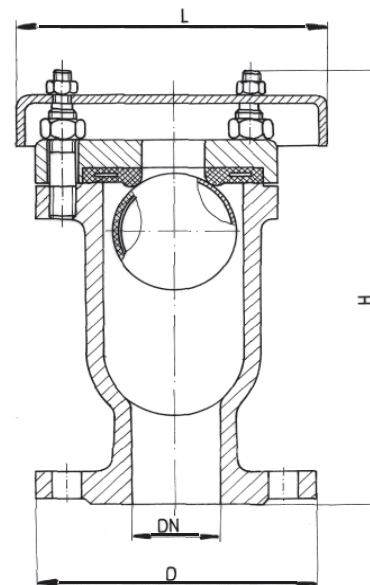

SAUDI VALVES MANUFACTURING

Tel.: +966 3 341 8514 - Fax: +966 3 341 8515
 P. O. Box 10137 Jubail Industrial City, 31961 The Kingdom of Saudi Arabia
 E-mail: info@saudivalves.com - Internet: www.saudivalves.com

ISO 9001

BUREAU VERITAS
 Certification



N° 215125

20.03.2009